
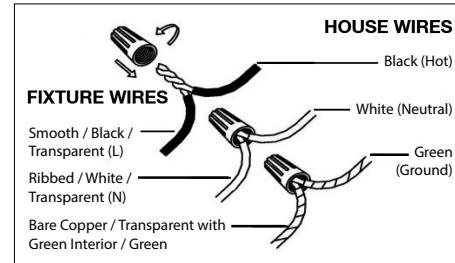


Assembly Instructions: 1323-1W (Ella)

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, contact the place of purchase.

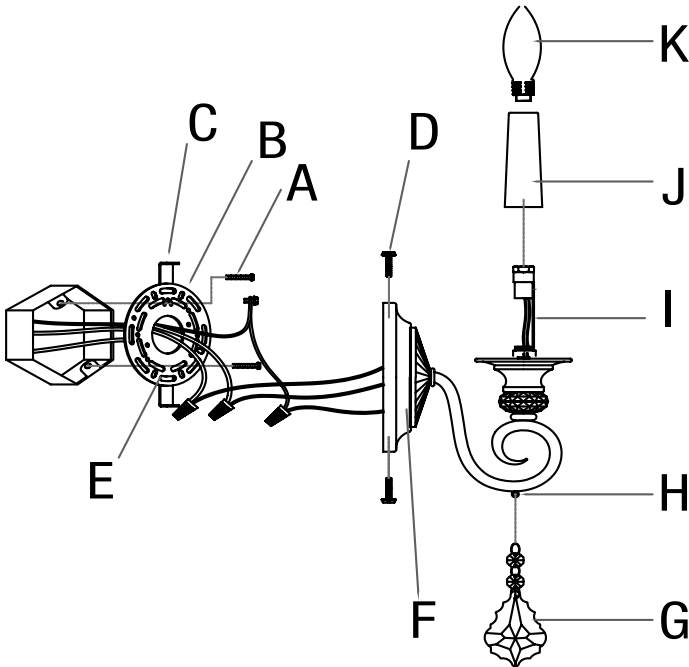

PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the wall, including the old mounting strap.

Mounting strap (B) contains several pairs of threaded holes. Find the pair of holes that matches the spacing of the holes on the junction box and your fixture's backplate. Note: In order for the fixture to hang straight, brackets (C) should be centered at the top and bottom. Pull the house wires through the center of mounting strap (B). Place mounting strap (B) over the junction box so that mounting screws (A) are horizontal, and in alignment with the hole locations on the fixture's backplate (F). Secure mounting strap (B) to the junction box with mounting screws (A) and a screwdriver. Tighten the screws securely.

CONNECTING THE WIRES

Attach the fixture's wires to the power supply wires from the junction box. Connect black (hot) to smooth/black/transparent (L); white (neutral) to ribbed/white/transparent (N); and ground (green) to bare copper/green/transparent with green interior. Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on the mounting bracket/mounting strap and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket/mounting strap. Tuck all wires neatly into the junction box.

FINISHING THE INSTALLATION

Place backplate (F) over brackets (C) of mounting strap (B) and line up the holes on the top and bottom of the backplate with the holes in brackets (C). Insert screws (D) into the holes at the top and bottom of backplate (F) and use a screwdriver to tighten the screws securely.

Slide candle sleeve (J) over socket (I).

Install light bulb (K) (not provided) in accordance with the fixture's specifications.


Your installation is now complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Dry with a lint-free or microfiber cloth.


1323 Crystal Instructions

A - crystal drop




AA is a double sided crystal,
50mm
Part: PT-CRYSTAL-1323-AA


AS is a single sided crystal,
50mm
Part: PT-CRYSTAL-1323-AS




A1

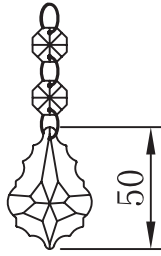

A2

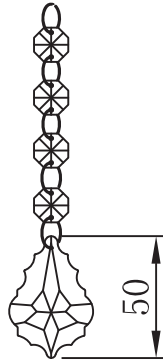


A3

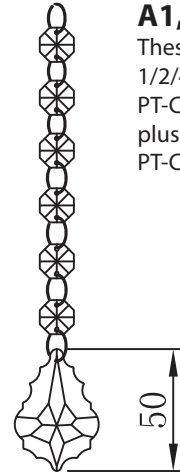

A4


A1, A2, A3, and A4
These crystal drops use
1/2/4/6 pieces of
PT-CRYSTAL-1323-D14
plus 1 piece of
PT-CRYSTAL-1323-AS

B - crystal drop




BB is a double sided crystal,
76mm
Part: PT-CRYSTAL-1323-BB

BS is a single sided crystal,
76mm
Part: PT-CRYSTAL-1323-BS

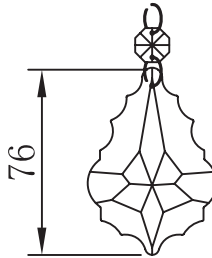

BB1


BB1 uses 1 piece of
PT-CRYSTAL-1323-D14 plus
1 piece of PT-CRYSTAL-
1323-BS

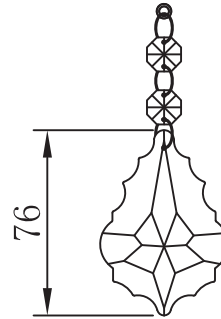


B2

B2 uses 2 pieces of
PT-CRYSTAL-1323-D14
plus 1 piece of
PT-CRYSTAL-1323-BS

C - crystal drop




CC is a double sided crystal,
89mm
Part: PT-CRYSTAL-1323-CC

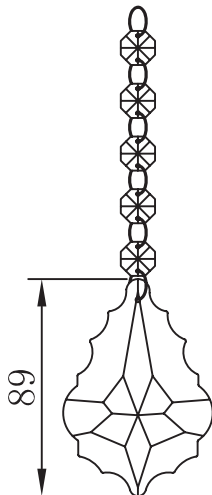

CC5

CC5 uses 5 pieces of part
PT-CRYSTAL-1323-D14 plus
1 piece of PT-CRYSTAL-
1323-CC

D - crystal drop

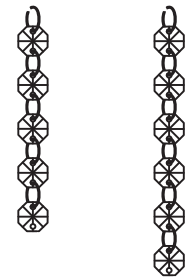

D5/D6 uses 5/6 pieces of
replacement part
PT-CRYSTAL-1323-D12