ASSEMBLY AND INSTALLATION INSTRUCTIONS

OW37263

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

Screw
Wall box
Lock Nut
Fixture Wire
Bolt Nut
Wire Nut
House Grounding Wire
Cross Bar
Green Grounding Screw
Mounting Screw
Fixture Grounding Wire
Back Plate
Fixture
Frame
Socket Ring
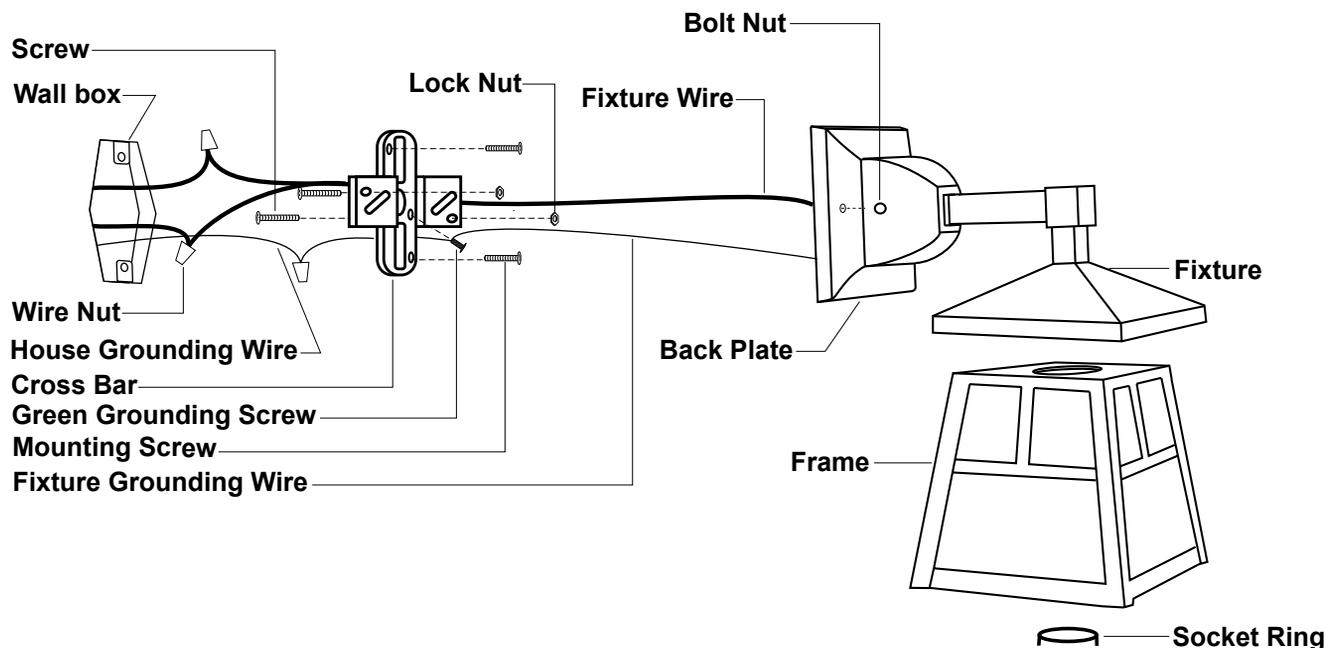
1. Attach two screws through the cross bar, then secure them with two lock nuts. Adjust the length of the screws if necessary.
2. Attach the cross bar to the wall box by using two mounting screws.
3. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire nuts:
   ---The black wire from the light to the black wire from the power source.
   ---The white wire from the light to the white wire from the power source.
   ---Attach the fixture grounding wire to the cross bar with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
   Carefully tuck the wires back into the wall box.
4. Attach the back plate to the cross bar by inserting the screws, then secure it with the bolt nuts.
5. Attach the frame onto the fixture, then secure it with the socket ring.
6. Install a bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.
7. Turn on the power at the main fuse or circuit breaker box.

VAXCEL LIGHTING

060116