



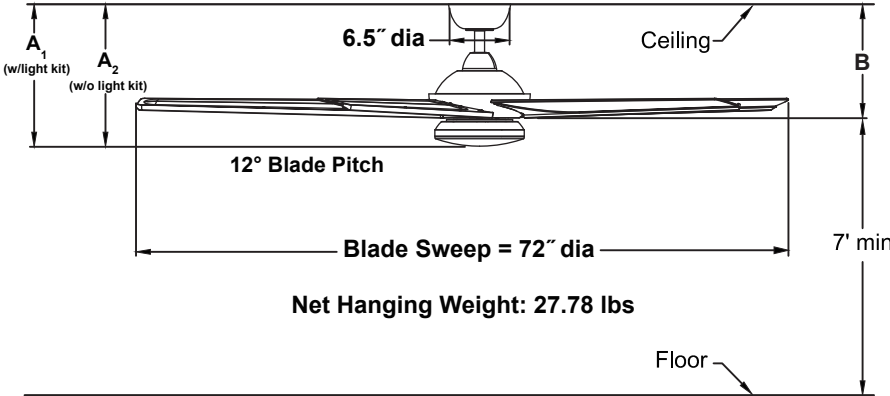

**SUBTLE™**

# FPD6236\*\* 72" Ceiling Fan

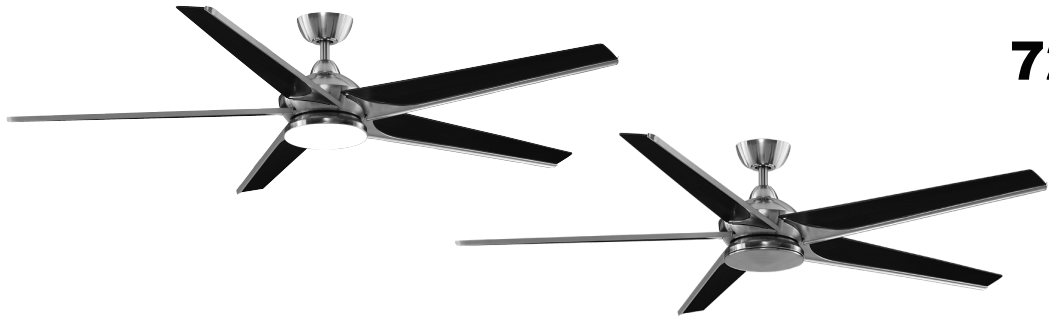

	A <sub>1</sub>	A <sub>2</sub>	B
Fan w/4.5" downrod	14.63"	14.63"	11.90"
Fan w/12" downrod	22.13"	22.13"	19.40"
Fan w/18" downrod	28.13"	28.13"	25.40"
Fan w/24" downrod	34.13"	34.13"	31.40"
Fan w/36" downrod	46.13"	46.13"	43.40"
Fan w/48" downrod	58.13"	58.13"	55.40"
Fan w/60" downrod	70.13"	70.13"	67.40"
Fan w/72" downrod	82.13"	82.13"	79.40"

Available Finishes	
BN	Brushed Nickel with bourbon Blade and Opal Frosted Glass / Steel Cap
DZ	Dark Bronze with bourbon Blade and Opal Frosted Glass / Steel Cap
GR	Matte Greige with Weathered Wood Blade and Opal Frosted Glass / Steel Cap

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

158 x 22 sensorless DC motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

**BLADES:**

5 bladed blade sets are available in plastic with aluminum trim materials.

**CONTROL OPTIONS:**

TR205 hand-held remote control is included. Push button remote control with variable fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206 wall control is available—sold separately. Instructions are provided with each control.

**LIGHTING OPTIONS:**

One 18-watt dimmable LED.

**DOWNROD OPTIONS:**

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling upto 27°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry and damp locations.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	92	8197	204	0.49	40
Med	60	5464	546	0.14	10
Low	29	2487	777	0.05	3

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1350	3000	80%

Energy Guide FTC			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
23	3361	6	148